


'Skoo Light' series

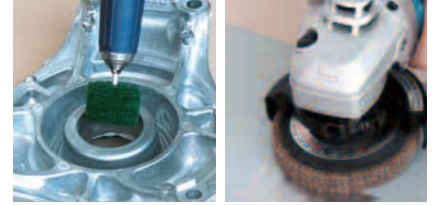

Applications

- Removing oxide films, rust ● Cleaning prior to welding
- Roughening surfaces prior to painting, laminating ● Removing burn marks after welding

Skoo Light Wheel S

Skoo Light Wheel M



The "S type" products, made of nonwoven abrasive material alone, come with a soft touch that ensures a mild finish.

The "M type" products, with interlaced nonwoven cloth and abrasive cloth, have more polishing power than the "S type" products.

Skoo Light Disc S

Skoo Light Disc M



The "S type" products, made of nonwoven abrasive material alone, come with a soft touch that ensures a mild finish.


The "M type" products, with interlaced nonwoven cloth and abrasive cloth, have more polishing power than the "S type" products.

Skoo Light Wheel S



item no.	dia x width x shaft dia x shaft length(mm)	RPM	grit													Q'ty/box			
			24	36	40	60	80	100	120	150	180	240	320	400	600		800	1000	0
SW3025-S	30 x 25 x 6 x 40	3,000r.p.m.				●	●	●	●		●	●	●	●					5
SW4025-S	40 x 25 x 6 x 40	3,000r.p.m.				●	●	●	●		●	●	●	●					5
SW5025-S	50 x 25 x 6 x 40	3,000r.p.m.				●	●	●	●		●	●	●	●					5
SW6025-S	60 x 25 x 6 x 40	3,000r.p.m.				●	●	●	●		●	●	●	●					5
SW8025-S	80 x 25 x 6 x 40	3,000r.p.m.				●	●	●	●		●	●	●	●					5

Skoo Light Wheel M



item no.	dia x width x shaft dia x shaft length(mm)	RPM	grit													Q'ty/box			
			24	36	40	60	80	100	120	150	180	240	320	400	600		800	1000	0
SW3025-M	30 x 25 x 6 x 40	8,000r.p.m.				●	●	●	●		●	●	●	●					5
SW4025-M	40 x 25 x 6 x 40	8,000r.p.m.				●	●	●	●		●	●	●	●					5
SW5025-M	50 x 25 x 6 x 40	8,000r.p.m.				●	●	●	●		●	●	●	●					5
SW6025-M	60 x 25 x 6 x 40	8,000r.p.m.				●	●	●	●		●	●	●	●					5
SW8025-M	80 x 25 x 6 x 40	8,000r.p.m.				●	●	●	●		●	●	●	●					5

Skoo Light Disc S



item no.	dia x hole(mm)	RPM	grit													Q'ty/box			
			24	36	40	60	80	100	120	150	180	240	320	400	600		800	1000	0
SD10016-S	100 x 16	5,000r.p.m.				●	●	●	●		●	●	●	●					5

Skoo Light Disc M



item no.	dia x hole(mm)	RPM	grit													Q'ty/box			
			24	36	40	60	80	100	120	150	180	240	320	400	600		800	1000	0
SD10016-M	100 x 16	13,000r.p.m.				●	●	●	●		●	●	●	●					5